


REV	DESCRIPTION	DATE



Technical Requirements:

1. Wiring harness shall comply with IPC/WHMA-A-620;
2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
3. Product use temperature: -40°C~125°C;
4. All parts must be ROHS compliant;

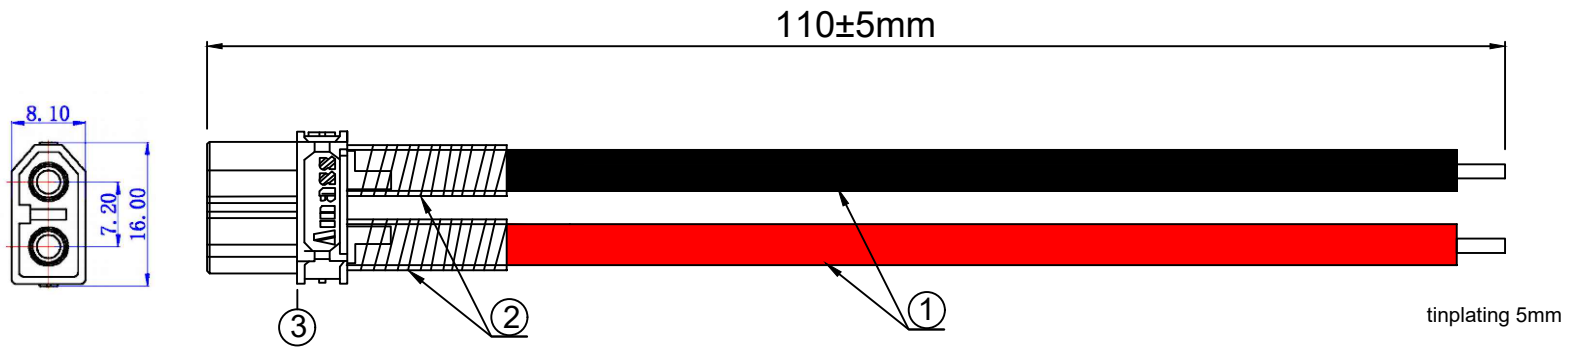

					DONGGUAN RUIYI ELECTRONIC CO., LTD.				
					UNIT	SHEET	ISSUING DATE	TITLE:	
					mm	1 of 1		XT30U-F TO 3135#16 red=black L=110mm	
3	connector	XT30U-F	1	PCS	DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
2	Tube	D4.0 black heat shrink tube L=15mm	2	PCS	seven			2019-6-15	
1	cable	UL3135#16 AWG RED=BLACK	100	mm	GENERAL TOLERANCE			DRAW NO.: W1609-047	
NO	name	Specification	QTY	Unit	X.X±0.8 X.XX±0.5 X.XXX±0.3	PROJECTION ⊲ ⊕		REV. AO	