


REV	DESCRIPTION	DATE

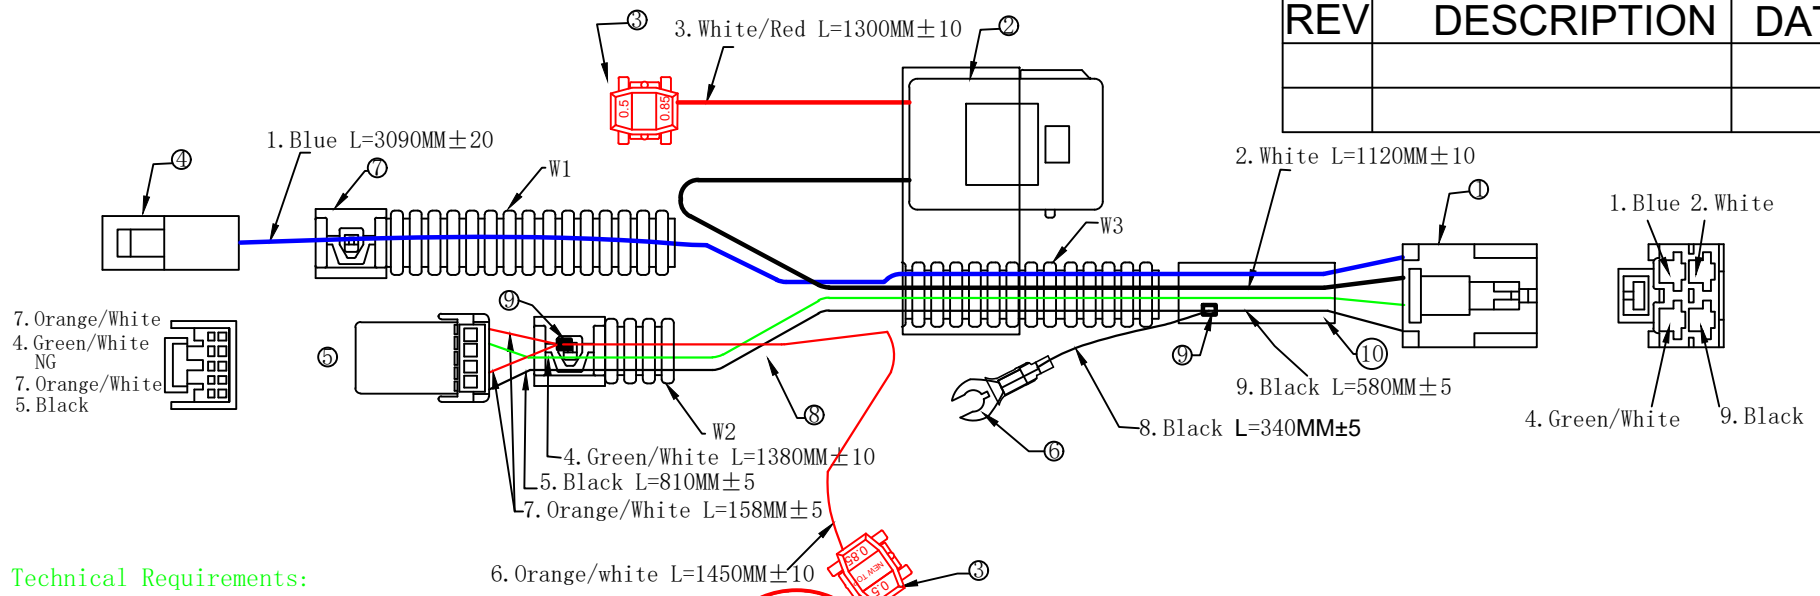

**Technical Requirements:**

1. Wiring harness shall comply with QC-T/29106-2014;
2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
3. Product use temperature: -40°C~125°C;
4. All parts must be ROHS compliant;


W	Tube	Specification	QTY	Unit
		D7*10mm BLACK PP corrugated pipe; W1=2030, W2=350, W3=390	1	PCS
10	Tube	D7.0 BLACK PVC TUBE L=560mm	1	PCS
9	Terminal	WS4005	2	PCS
8	CLIP	RY-P-6115	1	PCS
7	CLIP	RY-P-6114	2	PCS
6	Terminal	YT1206402-50C	1	PCS
5	CONNECTOR	DJ7035-2.2-11 (DJ7041-2.2)	1	PCS
4	CONNECTOR	DJ7011-6.3-21 (DJ621-B6.3)	1	PCS
3	CLIP	RED CLIP RY-P-77005	2	PCS
2	CONNECTOR	(DJ621-E6.3*2) 15A FUSE*1	1	PCS
1	CONNECTOR	DJ7042-6.3-21 (DJ621-E6.3)*4PCS	1	PCS
NO	name	Specification	QTY	Unit

NO	Specification	L	QTY	Detail
9	0.5mm <sup>2</sup> Black	580	1pcs	6 (DJ621-E6.3)+7mm (demi-peel) OD:1.6
8	0.5mm <sup>2</sup> Black	340	1pcs	6 (YT1206402-50C)+7mm (demi-peel) OD:1.6
7	0.5mm <sup>2</sup> Orange/White	158	2pcs	4 (DJ7041-2.2)+7mm (demi-peel) OD:1.6
6	0.5mm <sup>2</sup> Orange/White	1450	1pcs	6mm (demi-peel)+7mm (demi-peel) OD:1.6
5	0.5mm <sup>2</sup> Black	810	1pcs	4 (DJ7041-2.2)+7mm (demi-peel) OD:1.6
4	0.5mm <sup>2</sup> Green/White	1380	1pcs	6 (DJ621-E6.3)+4 (DJ7041-2.2) OD:1.6
3	1.25mm <sup>2</sup> White/Red	1300	1pcs	6 (DJ621-E6.3)+6mm (demi-peel) OD:2.1
2	0.85mm <sup>2</sup> White	1120	1pcs	6 (DJ621-E6.3)+6 (DJ621-E6.3) OD:1.8
1	0.75mm <sup>2</sup> Blue	3090	1pcs	6 (DJ621-B6.3)+6 (DJ621-E6.3) OD:1.8
NO	Specification	L	QTY	Detail

**DONGGUAN RUIYI ELECTRONIC CO., LTD.**

UNIT	SHEET	ISSUING DATE	TITLE:	
mm	1 of 2		Toyota Prius Fog light harness -A	
DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
			2019-07-02	
GENERAL TOLERANCE			DRAW NO.:	REV. AO
X.X±0.8 X.XX±0.5 X.XXX±0.3	PROJECTION		W1909-007	

REV	DESCRIPTION	DATE

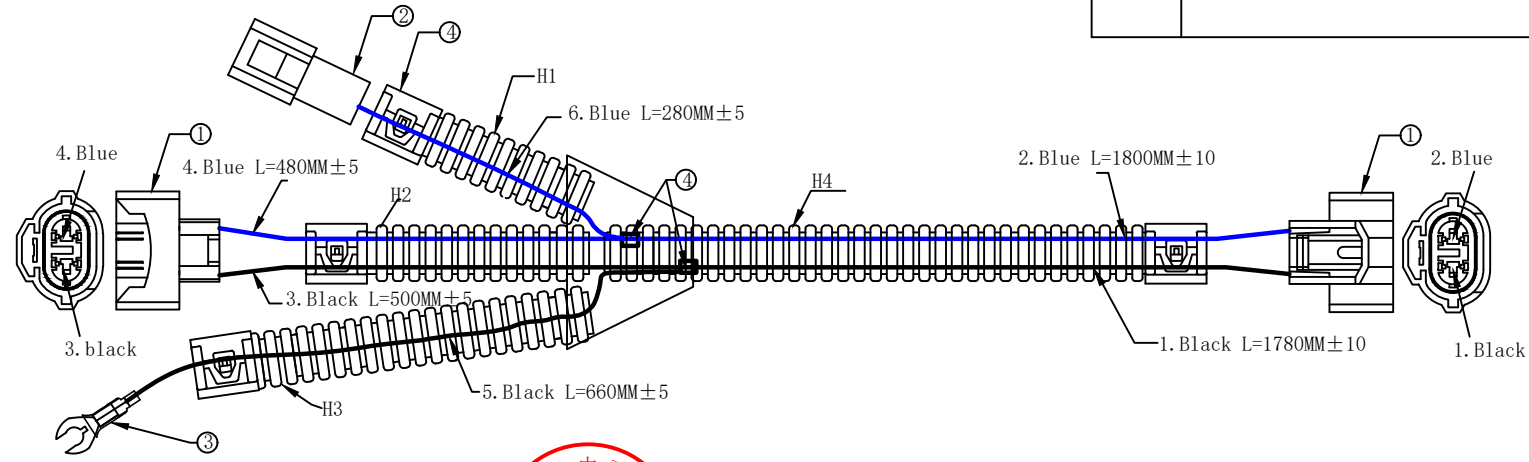

- Technical Requirements:**
1. Wiring harness shall comply with QC-T/29106-2014
  2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%
  3. Product use temperature: -40°C~125°C;
  4. All parts must be ROHS compliant;



序号	规格型号	裁线长	数量	剥口	备注
6	0.75mm <sup>2</sup> Bule	280	1pcs	6 (DJ612-6. 3A)+7mm(demi-peel)	OD:1.8
5	0.75mm <sup>2</sup> Black	660	1pcs	6 (YT1206402-50C)+7mm(demi-peel)	OD:1.8
4	0.75mm <sup>2</sup> Blue	480	1pcs	6 (DJ621-G3*0. 6B)+7mm(demi-peel)	OD:1.8
3	0.75mm <sup>2</sup> Black	500	1pcs	6 (DJ621-G3*0. 6B)+7mm(demi-peel)	OD:1.8
2	0.75mm <sup>2</sup> Blue	1800	1pcs	6 (DJ621-G3*0. 6B)+7mm(demi-peel)	OD:1.8
1	0.75mm <sup>2</sup> Black	1780	1pcs	6 (DJ621-G3*0. 6B)+7mm(demi-peel)	OD:1.8

序号	名称	规格/型号	数量	单位	料号
H	TUBE	D7*10mm BLACK PPcorrugated pipe, H1=210, H2=410, H3=600, H4=1760	1	PCS	
5	TERMINAL	WS5005	2	PCS	
4	CLIP	RY-P-6114	4	PCS	
3	TERMINAL	YT1206402-50C	1	PCS	
2	CONNECTOR	DJ7011-6. 3-11 (DJ611-6. 3A)	1	PCS	
1	CONNECTOR	6189-0935 (DJ621-G3*0. 6B*2)	2	PCS	

**DONGGUAN RUIYI ELECTRONIC CO., LTD.**

UNIT	SHEET	ISSUING DATE	TITLE:	
mm	2 of 2		Toyota Prius Fog light harness -B	
DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
			2019-07-02	
GENERAL TOLERANCE			DRAW NO.:	REV. AO
X.X±0.8 X.XX±0.5 X.XXX±0.3	PROJECTION	☞	W1909-007	