


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| | | |
| | | |

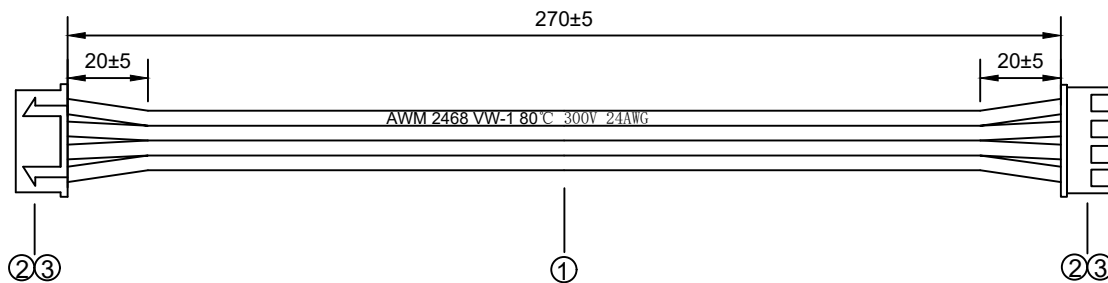

Technical Requirements:

1. Wiring harness shall comply with IPC/WHMA-A-620A;
2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
3. Product use temperature: -20°C~80°C;
4. All parts must be ROHS compliant;

| | | | | | | | | | | |
|----|-----------|------------------|-----|------|-------------------------------------|-------------------|--------------|-----------------------------|----------|--|
| | | | | | DONGGUAN RUIYI ELECTRONIC CO., LTD. | | | | | |
| | | | | | UNIT | SHEET | ISSUING DATE | TITLE: | | |
| | | | | | mm | 1 of 1 | | XH-4P TO 2468#24-4C L=270mm | | |
| 3 | connector | RY:XH-4P | 2 | PCS | DRAWN BY | APPROVED BY | APPROVED BY | DATE | CUSTOMER | |
| 2 | terminal | RY:XH-TPE | 8 | PCS | seven | | | 2017-12-06 | | |
| 1 | cable | UL2468#24*4C AWG | 280 | mm | GENERAL TOLERANCE | | | DRAW NO.: W1713-019 | | |
| NO | name | Specification | QTY | Unit | X.X±0.8 X.XX±0.5 X.XXX±0.3 | PROJECTION ⊲ ⊕ | | REV. AO | | |