


REV	DESCRIPTION	DATE

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25° C ~ +85° C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0

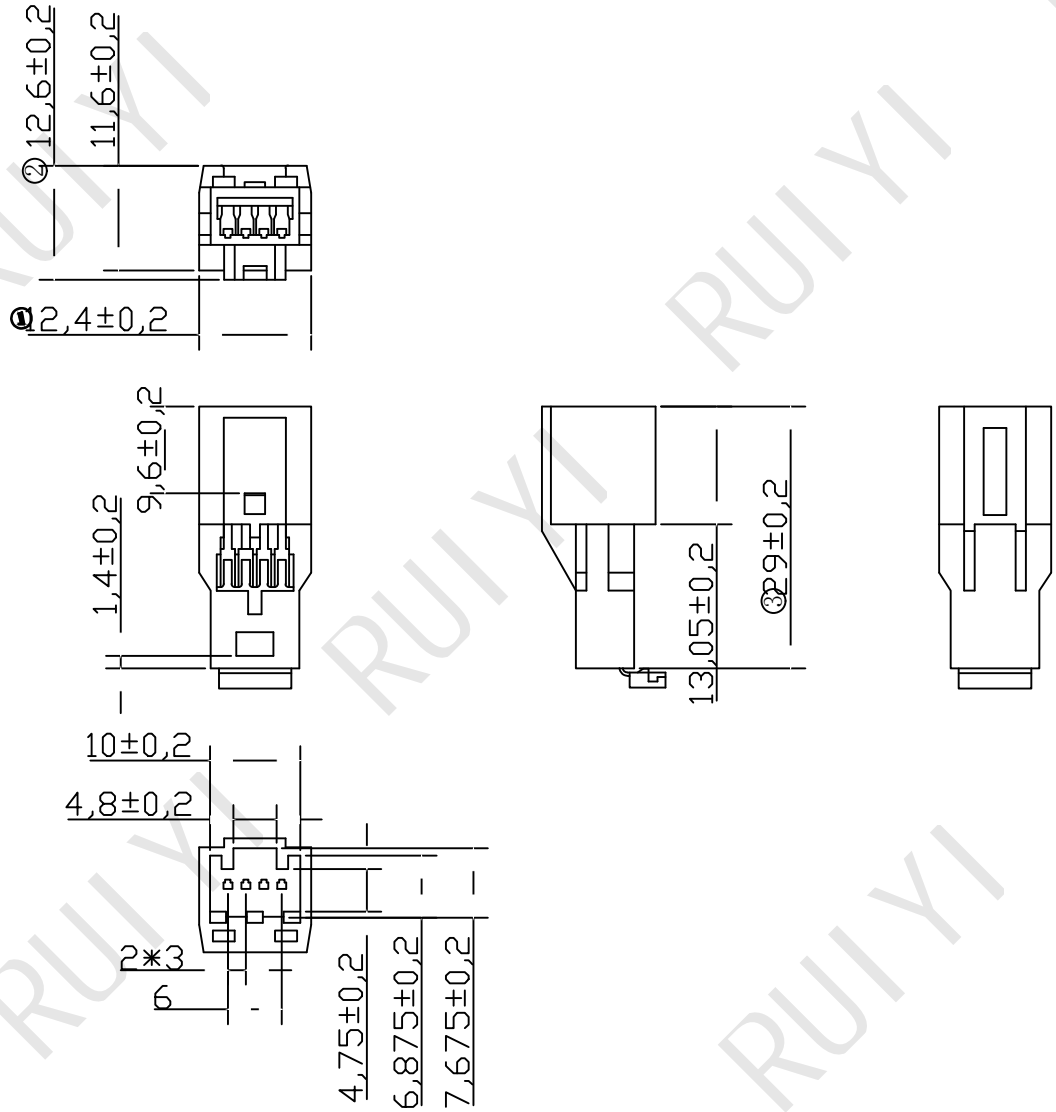


DONGGUAN RUIYI ELECTRONIC CO., LTD.

UNIT	SHEET	ISSUING DATE	TITLE:	
mm	1 of 1		3A04MW	
DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
Seven lee	jason		2017-06-20	
GENERAL TOLERANCE				
X.X±0.8	PROJECTION		DRAW NO.:	REV.
X.XX±0.5	▽ ⊕		W1705-04	A0
X.XXX±0.3				

REV	DESCRIPTION	DATE

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25° C ~ +85° C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0

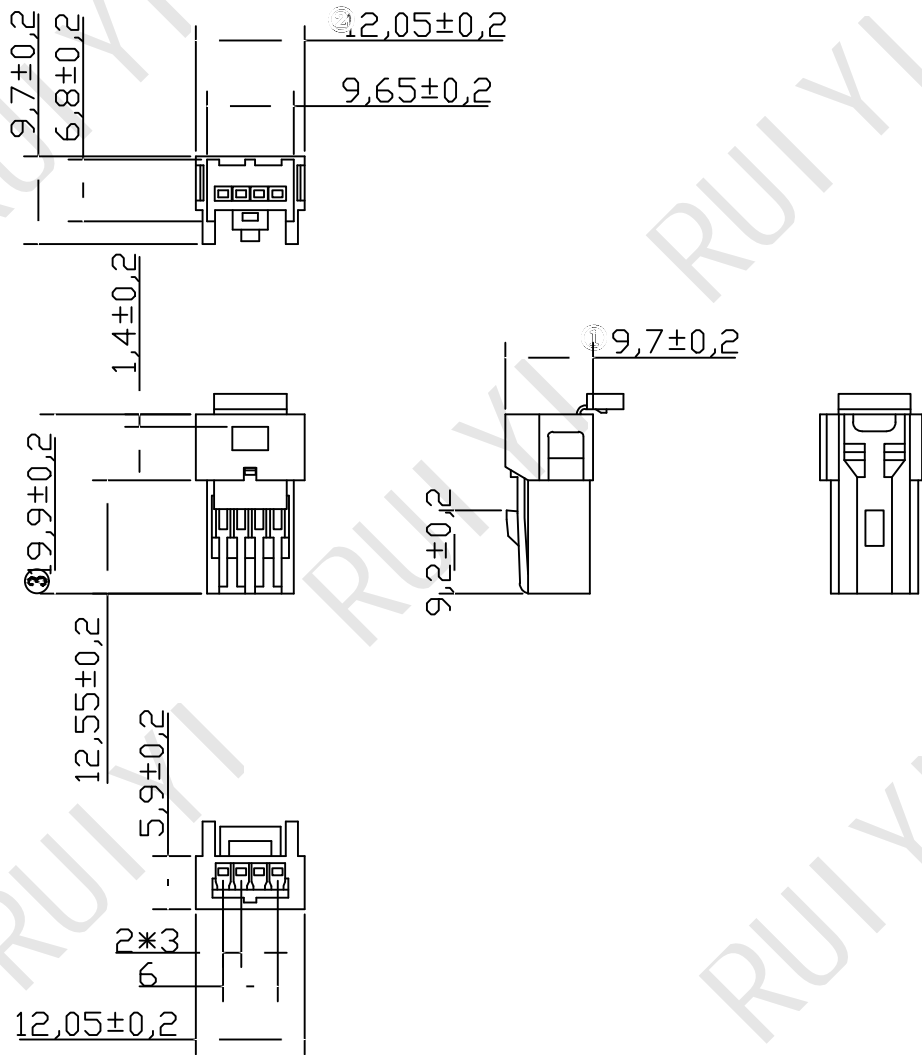

DONGGUAN RUIYI ELECTRONIC CO., LTD.

UNIT	SHEET	ISSUING DATE	TITLE:	
mm	1 of 1		3A04FW	
DRAWN BY		APPROVED BY	APPROVED BY	DATE
Seven lee		jason		2017-06-20
GENERAL TOLERANCE				
X.X±0.8		PROJECTION		DRAW NO.:
X.XX±0.5		≡ ⊕		W1705-05
X.XXX±0.3				REV. A0