


REV	DESCRIPTION	DATE

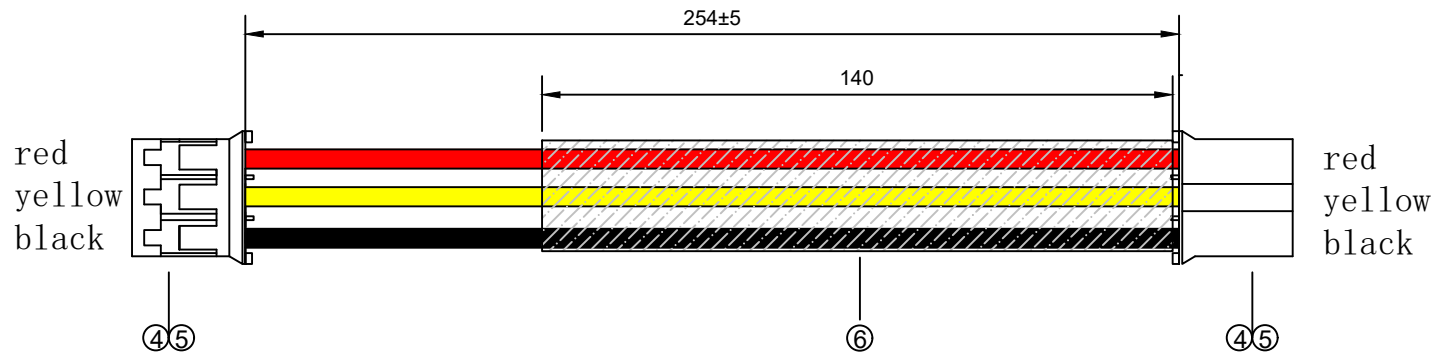

**Technical Requirements:**

1. Wiring harness shall comply with IPC/WHMA-A-620A;
2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
3. Product use temperature: 80°C;
4. All parts must be ROHS compliant;

NO	Name	Specification	QTY	Unit	DONGGUAN RUIYI ELECTRONIC CO., LTD.																																																														
6	tube	Ø3.0 BLACK heat shrink tubing L=140mm	1	PCS	<table border="1" style="width: 100%;"> <tr> <td>UNIT</td> <td>SHEET</td> <td>ISSUING DATE</td> <td colspan="2">TITLE:</td> </tr> <tr> <td>mm</td> <td>1 of 1</td> <td> </td> <td colspan="2">HARN-AOXR-MOD</td> </tr> <tr> <td colspan="2">DRAWN BY</td> <td>APPROVED BY</td> <td>APPROVED BY</td> <td>DATE</td> <td>CUSTOMER</td> </tr> <tr> <td colspan="2"> </td> <td> </td> <td> </td> <td>2023. 11. 30</td> <td> </td> </tr> <tr> <td colspan="5">GENERAL TOLERANCE</td> <td>DRAW NO.:</td> <td>W2306-002</td> <td>REV.</td> <td>AO</td> </tr> <tr> <td colspan="2">X.X±0.8</td> <td colspan="2">PROJECTION</td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td colspan="2">X.XX±0.5</td> <td colspan="2"> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td colspan="2">X.XXX±0.3</td> <td colspan="2"> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>					UNIT	SHEET	ISSUING DATE	TITLE:		mm	1 of 1		HARN-AOXR-MOD		DRAWN BY		APPROVED BY	APPROVED BY	DATE	CUSTOMER					2023. 11. 30		GENERAL TOLERANCE					DRAW NO.:	W2306-002	REV.	AO	X.X±0.8		PROJECTION							X.XX±0.5									X.XXX±0.3								
UNIT	SHEET	ISSUING DATE	TITLE:																																																																
mm	1 of 1		HARN-AOXR-MOD																																																																
DRAWN BY		APPROVED BY	APPROVED BY	DATE	CUSTOMER																																																														
				2023. 11. 30																																																															
GENERAL TOLERANCE					DRAW NO.:	W2306-002	REV.	AO																																																											
X.X±0.8		PROJECTION																																																																	
X.XX±0.5																																																																			
X.XXX±0.3																																																																			
5	connector	HRB: A2001H-3P	2	PCS																																																															
4	terminal	HRB: A2001-TPE	6	PCS																																																															
3	cable	UL1007#24 TS11/0.16*1.4 BLACK	264	mm																																																															
2	cable	UL1007#24 TS11/0.16*1.4 YELLOW	264	mm																																																															
1	cable	UL1007#24 TS11/0.16*1.4 RED	264	mm																																																															