
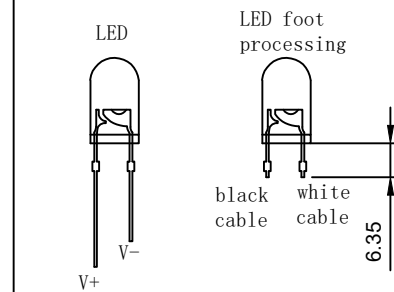


REV	DESCRIPTION	DATE

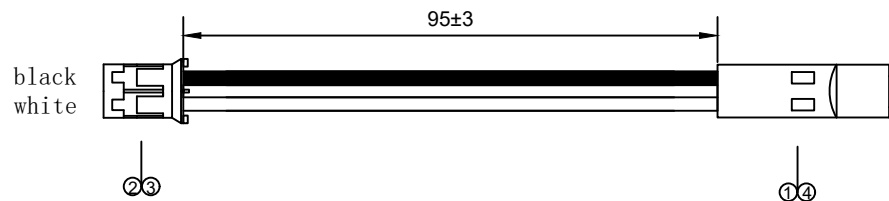

Technical Requirements:

- 1.Wiring harness shall comply with IPC/WHMA-A-620A;
- 2.Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
- 3.Product use temperature: 80°C;
- 4.All parts must be ROHS compliant;

					DONGGUAN RUIYI ELECTRONIC CO., LTD.				
4	led	SSL-LX3044IT	1	PCS	UNIT	SHEET	ISSUING DATE	TITLE:	
3	terminal	HRB: A2001-TPE	2	PCS	mm	1 of 1		HARN-AOXR-LED	
2	connrctor	HRB:A2001H-2P	1	pcs	DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
1	cable	CNX_B_X_4_1_04	1	pcs	GENERAL TOLERANCE			2023. 11. 30	
NO	Name	Specification	QTY	Unit	X.X±0.8 X.XX±0.5 X.XXX±0.3	PROJECTION ⊲ ⊕	DRAW NO.: W2306-003		REV. AO