


REV	DESCRIPTION	DATE

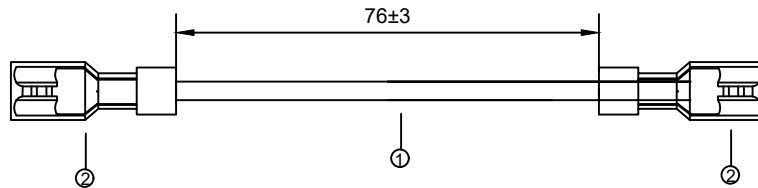

Technical Requirements:

1. Wiring harness shall comply with IPC/WHMA-A-620A;
2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
3. Product use temperature: 80°C;
4. All parts must be ROHS compliant;

					DONGGUAN RUIYI ELECTRONIC CO., LTD.				
					UNIT	SHEET	ISSUING DATE	TITLE:	
					mm	1 of 1		HARN-AOXR-FUSE	
					DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
2	terminal	TE:2-520184-2	2	PCS	GENERAL TOLERANCE			2023. 11. 30	
1	cable	UL1007#18 Ts34/0.178*2.1 BLACK	102	mm	X.X±0.8 X.XX±0.5 X.XXX±0.3		PROJECTION ⊲ ⊕	DRAW NO.:	
NO	Name	Specification	QTY	Unit				W2306-004	REV. AO