


REV	DESCRIPTION	DATE

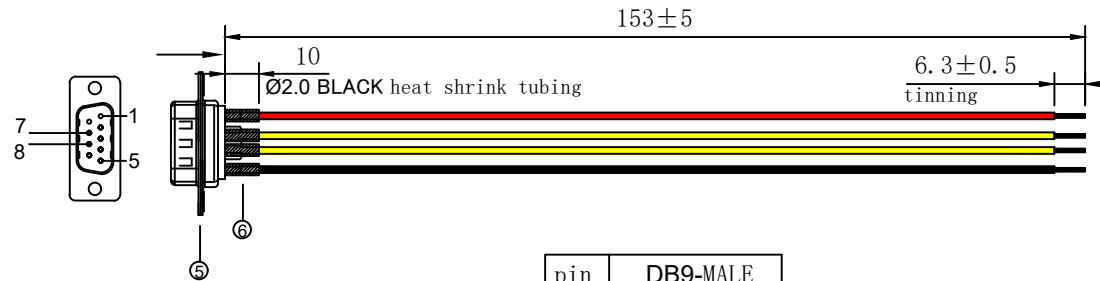

pin	DB9-MALE
1	red
5	black
7	yellow
8	yellow

Technical Requirements:

1. Wiring harness shall comply with IPC/WHMA-A-620A;
2. Wiring harness should have no dislocation, open circuit, short circuit, conduction yield of 100%;
3. Product use temperature: 80°C;
4. All parts must be ROHS compliant;

6	tube	Ø2.0 BLACK heat shrink tubing	4	pcs	DONGGUAN RUIYI ELECTRONIC CO., LTD.				
5	connector	MALE DB9	1	pcs					
4	cable	UL1007#22 Ts17/0.16*1.6 YELLOW	153	mm	UNIT	SHEET	ISSUING DATE	TITLE:	
3	cable	UL1007#22 Ts17/0.16*1.6 YELLOW	153	mm	mm	1 of 1		HARN-AOXR-M6-G2	
2	cable	UL1007#22 Ts17/0.16*1.6 BLACK	153	mm	DRAWN BY	APPROVED BY	APPROVED BY	DATE	CUSTOMER
1	cable	UL1007#22 Ts17/0.16*1.6 RED	153	mm	GENERAL TOLERANCE			2023. 12. 01	
NO	Name	Specification	QTY	Unit	X.X±0.8 X.XX±0.5 X.XXX±0.3		PROJECTION ▶⊕	DRAW NO.:	REV. AO
								W2306-005	